

GENERATOR SET DATA SHEET

Spec sheet: SS14-CPGK
 Noise data sheet (Open/enclosed): ND50-OSHHP / ND50-CS550
 Airflow data sheet: AF50-HHP
 Derate data sheet: DD50-OSHHP / DD50-CSHHP
 Transient data sheet: TD50-HHP

Fuel Consumption	Standby KW (kVA)				Prime KW (kVA)			
	1012(1265)				920 (1150)			
Ratings	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
Load								
US gph	18.5	30.8	44.0	58.7	14.5	26.2	38.9	52.7
L/hr	84.1	140.2	200.3	267.0	66.0	119.0	177.0	240.0

Engine	Standby Rating	Prime Rating
Engine model	QST30-G4	
Configuration	Cast iron, 50° V12 cylinder	
Aspiration	Turbocharged and charge air cooled	
Gross engine power output, kWm	1112	1007
BMEP at set rated load, kPa	2427	2199
Bore, mm	140	
Stroke, mm	165	
Rated speed, rpm	1800	
Piston speed, m/s	9.9	
Compression ratio	14:1	
Lube oil capacity, L	154	
Overspeed limit, rpm	2100 ±50	
Regenerative power, KW	78	
Governor type	Electronic	
Starting voltage	24 Volts DC	

Fuel Flow

Maximum fuel flow, L/hr	570
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature (°C)	71

Air

Combustion air, m ³ /min	80.50	75.10
Maximum air cleaner restriction, kPa	6.2	

Exhaust

Exhaust gas flow at set rated load, m ³ /min	220	197.0
Exhaust gas temperature, °C	525	495
Maximum exhaust back pressure, kPa	6.8	

Standard set-mounted radiator

Ambient design, °C	40	
Fan load, KWm	42	
Coolant capacity (with radiator), L	192	
Cooling system air flow, m ³ /min @ 12.7mmH ₂ O	17.07	
Total heat rejection, BTU/min	28500	24628
Maximum cooling air flow static restriction	19.1	

Weights*

	Open	Enclosed
Unit dry weight kgs	6387	N/A
Unit wet weight kgs	6528	N/A


Weights represent a set with standard features. See outline drawing for weights of other configurations.

Dimensions


	Length(A)	Width(B)	Height(C)
Standard open set dimensions	4266	1879	2052
Enclosed set standard dimensions	N/A	N/A	N/A

Genset outline

Open set

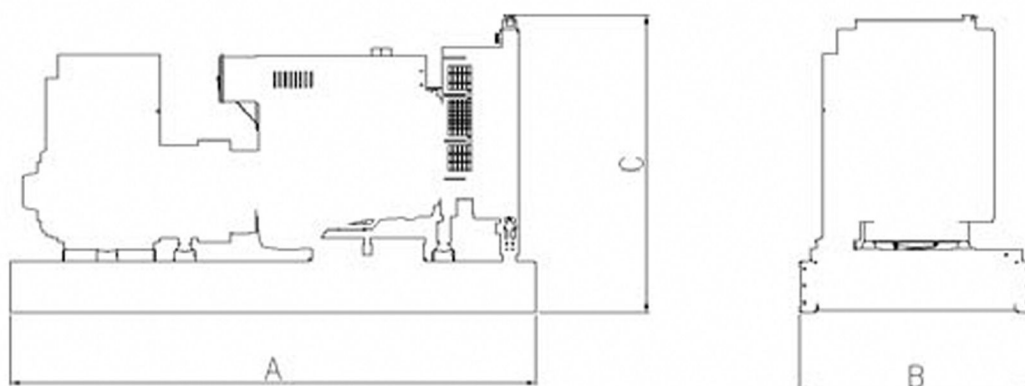

Enclosed set

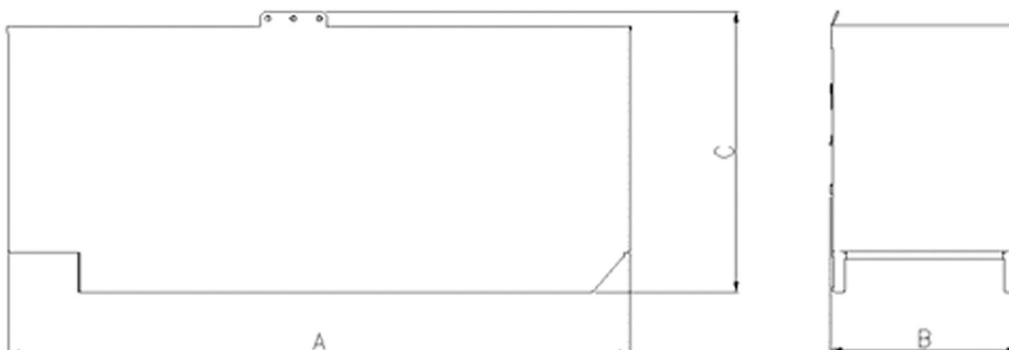

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator Data

Connection1	Temp rise degrees C	Duty2	Alternator	Voltage
Wye, 3 Phase	150/125C	S/P	HC6K	416-480V
Wye, 3 Phase	125/150C	S/P	HC6K	400-480V

Ratings Definitions

Emergency Standby Power (ESP)	Limited-Time running Power	Prime Power (PRP):	Base Load (Continuous) Power
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas For Calculating Full Load Currents:

Three phase output	Single phase output
$\frac{\text{KW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$	$\frac{\text{KW} \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$